



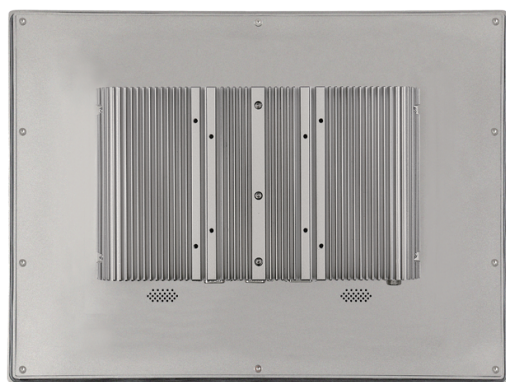

特点

- 可选Intel Celeron J4125/J6412或第8/10/11代 intel Core i3/i5/i7
- J4125/J6412 SODIMM x1, Intel Core i3/i5/i7 SODIMM x2
- LCD+HDMI 双显,同步/异步模式
- 全平面触摸屏,前面板IP65防护等级
- 低功耗无风扇
- 9 ~ 36V 宽压输入

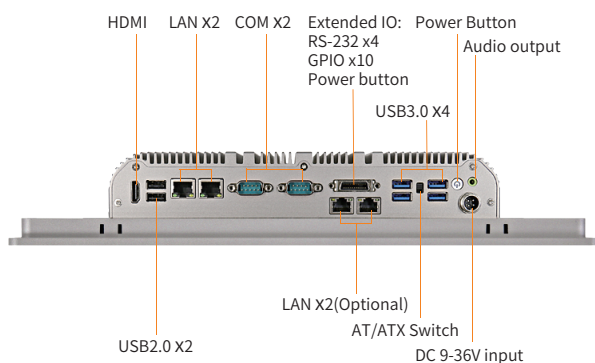


规格

系 统		
名称		
处理器	可选 Intel Celeron J4125/J6412或第8/10/11代 Intel Core i3/i5/i7 CPU	
系统内存	J4125/J6412 DDR4 SODIMM x1 Intel Core i3/i5/i7 DDR4 SODIMM x2	
网络	2x 2.5 GbE RJ45 Intel® i225V (4 x 2.5GbE RJ45 Intel i225V)	
I/O 接口	4 x USB2.0 ¹ , 2 x USB3.0 ¹ (J4125/J6412) 2 x USB2.0 ¹ , 4 x USB3.0 ¹ (第8/10/11代intel酷睿i3/i5/i7) 2 x DB-9 COM1&COM2,RS-232/422/485 1 x Audio Line-out 2 x8Ω 1W 功放输出 (可选) 1 x AT/ATX 拨码开关 1 x HDMI 1 x 扩展IO: 集成4路3线COM3-COM6, 10路GPIO, 1个远程开关	
存储	1 x M.2 2242/2260/2280 SATA 1 x SATA(2.5" SATA) 1 xM.2 2280 NVME	
扩展槽	M.2 3042/3052 3G/4G/5G 模块, 板载SIM卡槽 M.2 2230 WiFi蓝牙	
看门狗定时器	1~65535 秒可编程设置	
支持系统	Windows® 10/11, WES 10,LINUX	
结构		
材质	铝	
安装方式	VESA 75/ 100 面板安装	
尺寸	400.66x329.76x68.10 mm	
重量	TBD	
使用环境		
工作温度	-20℃ ~ 60℃	
存储温度	- 30℃ ~ 70℃	
存储湿度	10~90% @30℃, 无凝结	
电源		
电源输入	DC 9 ~ 36V 4-pin 航插	
显示屏		
LCD 类型	17.0" TFT-LCD	
分辨率	1280x1024	
最大颜色	16.2M	
亮度	250 cd/m²	
视角 (CR>=10)	- 85 ~ 85° (H), - 85 ~ 85° (V)	
背光	LED	
背光寿命 (小时)	30,000	
触摸屏		
类型	5线电阻式	投射式电容
透过率	78%	>85%
使用寿命	250克点击 1000万次	>5000万次

17.0" 工业平板电脑

尺寸 ■ 单位:mm

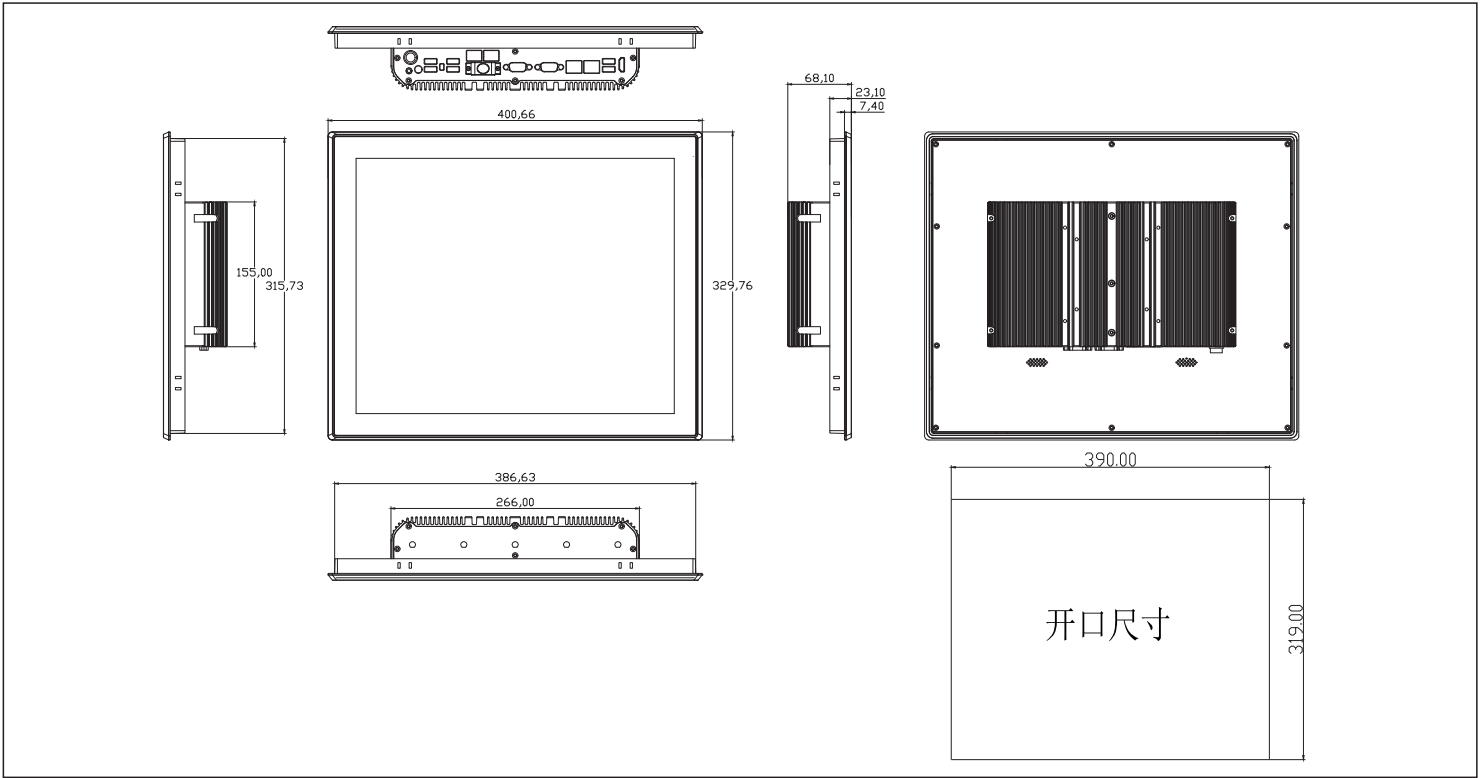

订购信息

物料编码	描述
	17.0" TFT LCD J4125 CPU DDR4 SODIMM x1 2xUSB3.0,4x USB2.0 2x LAN 6 x COM 1xPower Adapter
	17.0" TFT LCD J6412 CPU DDR4 SODIMM x1 2xUSB3.0,4x USB2.0 2x LAN 6 x COM 1xPower Adapter
	17.0" TFT LCD i5-8260U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	17.0" TFT LCD i5-8365U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	17.0" TFT LCD i7-8565U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	17.0" TFT LCD i7-8569U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	17.0" TFT LCD i5-10210U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	17.0" TFT LCD i5-10310U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	17.0" TFT LCD i7-10510U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter
	17.0" TFT LCD i7-10610U CPU DDR4 SODIMM x2 4xUSB3.0,2x USB2.0 2x LAN 6 x COM 1xPower Adapter

备注:

- (1) 配置赛扬系列CPU 的产品，I/O面板有6个USB2.0接口1个USB3.0接口，酷睿系列 CPU的产品，有4个USB3.0 接口和两个USB2.0
- (2) 配置赛扬系列CPU产品，内存有一个DDR4 内存槽；酷睿系列CPU产品，内存有两个DDR4内存槽

装箱单

- 电源适配器
- 凤凰端子
- 螺丝

可选配件

- WIFI模块
- 3G/4G/5G 通信模块
- VESA支架